



FINAL CHARGE® NOAT COOLANT / ANTIFREEZE

DESCRIPTION:

FINAL CHARGE® NOAT Extended Life Coolants/Antifreeze is an advanced nitrated Organic Acid Technology (OAT), globally formulated, ethylene glycol-based coolant which uses organic acid inhibitors to provide guaranteed protection for all cooling system metals. With proper maintenance,† FINAL CHARGE NOAT Extended Life Coolant/Antifreeze delivers guaranteed cooling system protection for 750,000 MILES of on-road use (8 years or 15,000 hours of off-road use) without the use of Supplemental Coolant Additives (SCAs). FINAL CHARGE NOAT Extended Life Coolant/Antifreeze is phosphate-free, silicate-free and borate-free.

BENEFITS:

- Works in ALL heavy-duty diesel, gasoline and natural gas engine cooling systems
- Guaranteed protection for 750,000 MILES of on-road use (8 years or 15,000 hours of off-road use)†
- Eliminates the need for SCAs and chemically charged filters
- Excellent heat transfer for high temperature applications such as engines with EGR and SCR systems
- Outstanding protection against corrosion and cavitation
- Non-abrasive formula can improve water pump seal life
- Eliminates drop-out, gel, and reduces scale
- Can be mixed with other coolants (to maintain corrosion protection, contamination levels should be kept below 25%)

PROPERTIES:

| | ASTM D6210/D3306 Specification | Typical Values for Extended Life 50/50 Pre-Diluted | |
|---------------------------|--------------------------------|--|--------------------|
| | | Extended Life | Extended Life |
| Specific Gravity 60/60 °F | D1122 | 1.115-1.124 | 1.05-1.08 |
| Freezing Point, 50% Vol. | — | 1-34° F (-37° C) | 34° F (-37° C) |
| Boiling Point, Reflux | D1120 | 325° F (163° C) | 265° F |
| Foam Test | D1881 | 50 ml/3 sec. Max. | 50 ml/3 sec. Max. |
| pH, 50 Vol. % | D1287 | 8.2 Min. -9.0 Max. | 8.2 Min. -9.0 Max. |
| Flash Point, COC | D92 | 8250° F (121° C) | - |
| Total Water, % | D1123 | -5% Max. | - |
| Color | — | Red | Red |

† Proper maintenance requires a complete cooling system flush and fill – and subsequent topping off, as needed – with Final Charge NOAT Extended Life 50/50 Pre-diluted Coolant/Antifreeze or Final Charge NOAT Extended Life Coolant/Antifreeze and water. For guaranteed protection, no other products or product supplements may be used. For all warranty details please visit www.peakhd.com. Follow OEM recommendations for specified maintenance.



Meets or exceeds the following specifications:

- ASTM D6210
- ASTM D4340
- ASTM D3306
- TMC RP329
- TMC RP351 (COLOR)

Recommended for use in heavy-duty vehicles and stationary equipment, regardless of fuel type, including:

- CAT EC-1
- CUMMINS CES 14603
- JOHN DEERE H24A1, H24C1
- NAVISTAR
- PACCAR
- VOLVO/MACK
- JL CASE
- KOMATSU
- INTERNATIONAL
- GM
- WAUKESHA
- FORD
- NEW HOLLAND
- FREIGHTLINER

| FREEZE/BOIL PROTECTION CHART | % of Cooling System Capacity | PROTECTS FROM | |
|------------------------------|------------------------------|------------------|----------------|
| | | Freezing Down to | Boiling Up to* |
| | 50 | -34° F | 265° F |
| *Using a 15 PSI Pressure Cap | 60 | -62° F | 270° F |
| | 70 | -84° F | 276° F |

*At sea level atmospheric pressure with 15lb. pressure cap. The boiling point decreases about 2° F per 1,000 feet of altitude and increases about 2.5° F per pound developed in the system.

PEAK

COMMERCIAL • INDUSTRIAL



FNAOB1
55 Gallon Concentrate Drum
 0-74804-05376-0



FNAB51
55 Gallon 50/50 Drum
 0-74804-05377-7



FNAOB3
1 Gallon Concentrate Bottle
 Gallon UPC: 074804-03349-6
 Case UPC: 074804-13349-3
 Case SCC 14: 1-0074804-03349-3



FNAB53
1 Gallon 50/50 Bottle
 Gallon UPC: 074804-03358-8
 Case UPC: 074804-13349-3
 Case SCC 14: 1-0074804-13358-5

FNAOBO
Bulk Concentrate

FNAOBO
Bulk Concentrate

| Part # | UNIT | Pack/Size | Case/Drum Dimensions | Unit Wt(lbs) | Units per Pallet | Pallets per Truck | Pallet Weight |
|---------------|------|-----------|---------------------------|--------------|------------------|-------------------|---------------|
| FNAOB3 | Case | 6/1 gal | 16" l x 12.5" w x 12.5" h | 60 | 36 | 20 | 2,210 |
| FNAB53 | Case | 6/1 gal | 16" l x 12.5" w x 12.5" h | 60 | 36 | 20 | 2,210 |
| FNAOB1 | Drum | 55 gal | 23.5" dia. x 34.5" h | 512.05 | 4 | 20 | 2,098 |
| FNAB51 | Drum | 55 gal | 23.5" dia. x 34.5" h | 512.05 | 4 | 20 | 2,098 |


(*) Includes Pallet Wt.: 20 @ 50 lbs. ea. = 1,000 lbs. Product Liability Information/Material Safety Data available upon request.

To order, please call Old World Industries, LLC Customer Service at 1-800-323-8755.

PEAK Commercial & Industrial products have been trusted by fleets, large and small, for over 65 years, to keep their equipment running.



Clint Bowyer

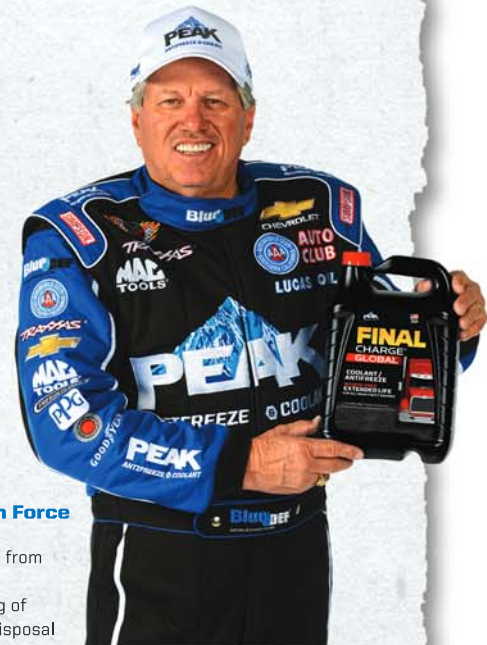

John Force



[peakhd.com](https://www.peakhd.com)

HANDLING AND SAFETY INFORMATION Refer to Old World Industries Material Safety Data Sheet (MSDS). The MSDS is available from your PEAK Performance Supplier at www.peakauto.com, or by calling Old World Industries' PEAK technical support line at 1-800-477-5847. We Only Have One World...Please Help Protect It. All laws and regulations should be observed when disposing of Antifreeze/Coolant and Radiator Fluids. Call the EPA or the office of your state or local environmental agency for details on disposal procedures.



We Support
Be Car Care Aware™
www.carcare.org

Distributed by Old World Industries, LLC Northbrook, IL 60062
 p 800.323.5440 www.peakauto.com

©2015 PEAK and the PEAK Mountain Graphic are Registered Trademarks of Old World Industries, LLC.

RUN TRUE™